


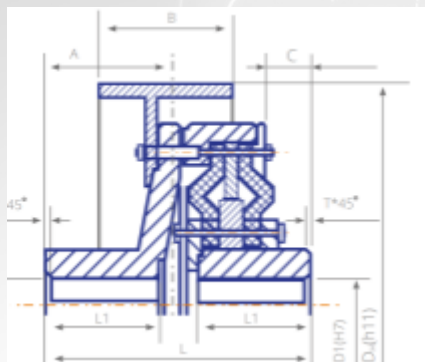

Sprzęgło Przeponowe z zabezpieczeniem DK16-043

typ: ATm
NR / DK16-043

Symbol	D _H (m1)	Wymiary																		T	B1/B2 W1/W2	Max Podatność		Moment obrotowy nominalny M _{nom}	Masa 1 szt.
		D1 Max (1)				D2 Max (1)				L	L1	L2	A	B	C	Y	X								
		żeliwo 250				żeliwo 250																			
		stalowo 270 - 480 lub S5				stalowo 270 - 480 lub S5																			
		[mm]																				[kN*°]			
D1 D2 min (H7)	nie zabesp.	zabesp. (2)	nie zabesp.	zabesp. (2)	żeliwo 250	żeliwo 250	stalowo 270 - 480 lub S5	stalowo 270 - 480 lub S5																	
1	200	25	40	28	50	40	32	35	138,5	50	57	63	80	20,5	2			3	2	0,16	14,8				
2	250	30	50	40	60	50	45	50	180	60	70	100	100	23	2,5			3,5	2	0,25	27,1				
3	320	35	50	40	65	50	50	55	205	70	79	102	120	24	2,5			4	2,5	0,40	47,4				
4	420	40	65	50	80	70	60	65	240	82	91	115	120	25	2,5			4,5	3	0,63	58,7				
5	400	50	75	70	100	80	70	80	300	110	115	144	150	33	3			5	3,5	1,00	97,7				
6	500	50	75	70	100	80	70	80	300	110	115	144	190	33	3			5	3,5	1,00	125,7				
7	400	50	95	75	110	100	90	100	372	140	145	175	150	45	3			6	4	2,50	149,2				
8	500	60	95	75	110	100	90	100	372	140	145	175	190	45	3			6	4	2,50	178,2				
9	630	60	95	75	110	100	90	100	372	140	145	175	235	45	3			5	4	250	237,8				